



Profine®



drinking water




professional use

silver

BACTERIOSTATIC, DECHLORINATION AND PURIFICATION OF DRINKING WATER

Profine® **Silver** removes bad odours and off-tastes, reduces chlorine, and has a filter rating of 0.5 microns. The cartridge is disposable and produced using Profine® Carbon Block technology enriched with silver to give a bacteriostatic feature.

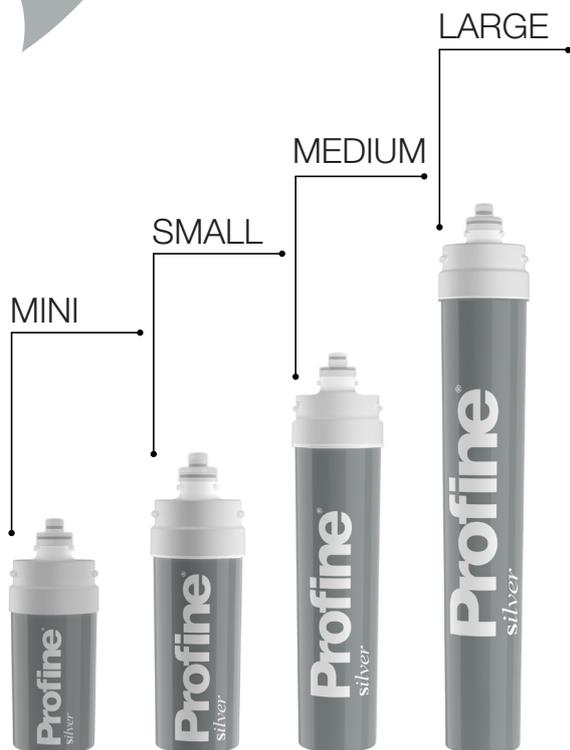

MODELS	
CODE	MODELS
PPSM0MN0-AZ9	MINI
PPSS0SM0-AX1	SMALL
PPSM0MD0-AWU	MEDIUM
PPSL0LR0-AWS	LARGE

DIMENSIONS			
MODELS	DIAMETER	HEIGHT (without head)	HEIGHT (with head)
MINI	874 mm	216,5 mm	245 mm
SMALL	874 mm	269 mm	300 mm
MEDIUM	874 mm	384 mm	420 mm
LARGE	874 mm	529 mm	560 mm

When installing and replacing the filter, consider the space required to remove the cartridge.

TECHNICAL SPECIFICATIONS	
MODELS	FLOW RATE
MINI	2.2 l/min*
SMALL	3 l/min*
MEDIUM	5 l/min*
LARGE	7 l/min*

* Capacities may vary based on incoming water and flow rates.



MATERIALS

Cartridge: polypropylene;
Filtration: technology with extruded Profine® Carbon Block activated carbon with silver ions.

GENERAL CHARACTERISTICS

Quick-connect disposable cartridge, with filtration by "Profine® Carbon Block" with silver ions technology; 0,5 micron filtration. Activated carbon filter for dechlorination and clarifying of drinking water. The filtration reduces chlorine content, organic compounds, odors/off-tastes from water. Thanks to the presence of silver ions, the antibacterial action downstream of the treatment system is guaranteed. Profine® Silver has been certified by TIFQ LAB, and complies with the high quality standards required by Italian law with regarding to the treatment systems of drinking water. Lab tests were conducted by simulating domestic use, also referring to long periods of inactivity of the system. For this information, you can consult the report of the reference laboratory, which presents the quality data that make SILVER cartridge become certified.

USE

Filtration for household systems for treatment of drinking water.

INSTALLATION

Upright or horizontal, as preferred with the help of support clip. Bayonet fitting for Profine® heads. Before removing the cartridge, close the inlet water valve and remove the pressure in the circuit by opening the downstream tap. Turn the empty cartridge by 90° clockwise, then remove the cartridge from the head. Insert the new cartridge, after removing the protective cap, and turn it 90° anticlockwise. Open the inlet valve and supply water for at least 5 minutes to activate the new cartridge. After brief periods of inactivity, supply water before drinking it. In the case of prolonged disuse, disinfect the system.

HEAD

Standard.



Profine®




drinking water



professional use

silver

BACTERIOSTATIC, DECHLORATION AND PURIFICATION OF DRINKING WATER

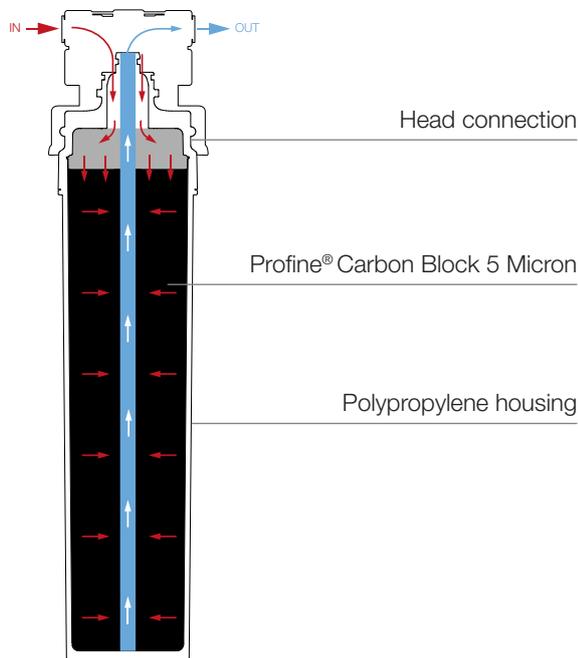

Temperature Min - Max
4 °C – 30 °C
(40 °F – 86 °F)



Operating pressure Min - Max
2 bar – 6 bar
(0,2 – 0,6 MPa)

PARAMETERS			
MINI	SMALL	MEDIUM	LARGE
7.000 l*	10.000 l*	15.500 l*	22.000 l*

* Capacities may vary based on incoming water and flow rates.

CHECKING PARAMETER CHANGE FOR SILVER SMALL AND SILVER MEDIUM				
PARAMETER	EU DIRECTIVE 98/83	TESTING WATER QUALITY	TREATED WATER QUALITY	NOTE
Ammonium (NH ₄)	≤ 0,50 mg/l	0,00 mg/l	0,00 mg/l	
pH	≥ 6,5 and ≤ 9,5	≥ 8,2 and ≤ 8,3	*S ≥ 8,1 and ≤ 8,4 mg/l *M ≥ 8,9 and ≤ 8,2 mg/l	
Solphate	≤ 250 mg/l	≥ 29,1 and ≤ 30,6 mg/l	*S ≥ 23,9 and ≤ 28,1 mg/l *M ≥ 17,3 and ≤ 21,1 mg/l	
Bacteria growth 22°C - 37°C	No abnormal change	No abnormal change	No abnormal change	Verifica dopo 60giorni di non utilizzo
Active Chlorine	0,20 mg/l *M 2 mg/l (Indic. NSF 42)	0,00 mg/l	0,00 mg/l	Riduzione dell'85%

PACKAGING (cardboars box 6 pieces)			
MODELS	WIDTH	DEPTH	HEIGHT
MINI	28 cm	19 cm	22,9 cm
SMALL	28 cm	20 cm	28 cm
MEDIUM	28 cm	20 cm	39,5 cm
LARGE	28 cm	20 cm	54 cm

REPLACEMENT

We recommend replacing the cartridge at the end of its nominal range, or if the output flow ate is too slow. It's better that you replace the cartridge within 365 days of its installation. Before removing the cartridge, close the upstream water inlet and eliminate the pressure in the circuit by opening the downstream tap. To activate the cartridge correctly, open the inlet valve and supply water for at least five minutes before drinking it.

COMPANY CERTIFICATIONS

Made in Italy by think:water, ISO 9001-2015 certified company (quality) and 14001-2015 (environmental).

CERTIFICATION PRODUCTS

Complies with **MOCA, DM 174/2004** and **DM 25/2012** regulations.

INACTIVITY

Short periods of inactivity: flushing of the cartridge is necessary; in case of prolonged disuse, it is possible to disinfect the system.

ENVIRONMENT

For the production of Profine® filters, the environmental impact is close to 0. All Profine® filters are BPA free.

DISPOSE OF THE SPENT CARTRIDGE

Dispose of the exhausted cartridge according to the 2014/955/EU Decision (EWC 15 02 03).